


Flange ASME 900 lb (ex ANSI 900)

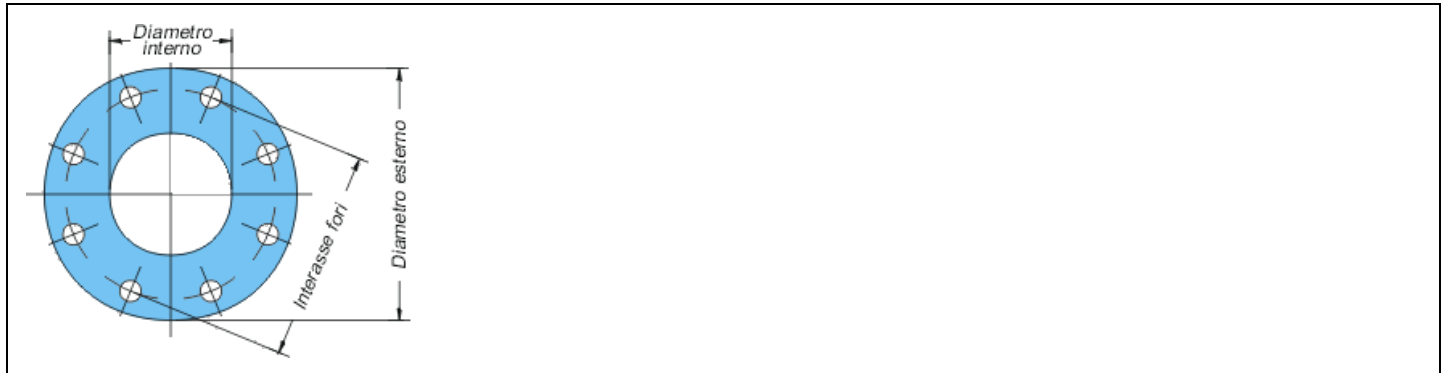

DN		ø esterno mm	ø interno mm	Spessore mm	Fori			Peso kg
mm	pollici				Interasse mm	Diametro mm	Numero	
15	1/2"	80	22	12	60	12	4	0,60
20	3/4"	95	27	14	70	14	4	0,80
25	1"	110	35	14	80	14	4	1,00
30	1" 1/4	120	42	16	90	14	4	1,20
40	1" 1/2	140	50	16	110	15	4	1,60
50	2"	160	60	16	125	18	4	2,10
60	2" 1/4	175	70	16	135	18	4	2,40
70	2" 1/2	185	80	16	145	18	4	2,60
80	3"	200	91	18	160	18	4	3,50
100	4"	230	114	18	180	22	4	4,30
125	5"	260	138	18	210	22	4	5,20
150	6"	290	164	18	240	22	6	6,10
200	8"	350	217	20	300	22	6	9,00
250	10"	400	271	22	350	22	8	12,00

300	12"	450	323	26	400	22	8	15,00
350	14"	520	375	28	465	25	10	21,00
400	16"	575	425	28	520	25	10	25,00
450	18"	630	475	30	570	25	12	31,00
500	20"	680	525	30	625	25	12	34,00
600	24"	790	630	32	725	28	16	42,00
700	28"	900	730	32	830	28	18	51,00
800	32"	1.020	830	34	940	32	20	67,00
900	36"	1.120	940	36	1.040	32	22	76,00
1.000	40"	1.220	1.040	36	1.140	32	24	95,00

www.fitavatrading.com